

Paper Title

First Author

Department of Electronics and Communication
Engineering
Organization Name, City, State, Country
Email- XYZ

Second Author

Department of Electronics and Communication
Engineering
Organization Name, City, State, Country
Email- XYZ

Abstract- Abstract should be times new roman with 9 fount single spacing. Abstract should be times new roman with 9 fount single spacing Abstract should be times new roman with 9 fount single spacing Abstract should be times new roman with 9 fount single spacing Abstract should be times new roman with 9 fount single spacing Abstract should be times new roman with 9 fount single spacing.

After that we select the ordered coefficient from 1 to N to get N coefficient. the formulae of watermark embedding are as follows.

$$C_w(i) = Y_o(i) + w(i) \tag{1}$$

2.2. Watermark Extraction algorithm –

The extraction algorithm process is the inverse of the embedding process.

Keywords – Watermarking, Haar

I. INTRODUCTION

Font should be 10 in times new roman with single spacing. Font should be 10 in times new roman with single spacing. Font should be 10 in times new roman with single spacing. Font should be 10 in times new roman with single spacing. Font should be 10 in times new roman with single spacing. Font should be 10 in times new roman with single spacing. The rest of the paper is organized as follows. Proposed algorithms are explained in section II. Experimental results are presented in section III. Concluding remarks are given in section IV.

II. PROPOSED ALGORITHM

2.1 Watermark embedding algorithm –

You can then continue to the low frequency components of the same upper left corner of the 2nd, 3rd inferior wavelet transform.

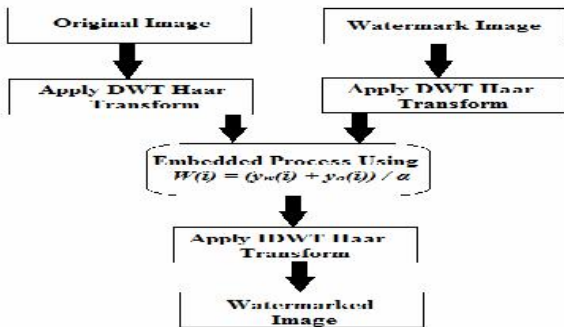


Figure 1. Watermark embedding algorithm Block Diagram

III. EXPERIMENT AND RESULT

The PC for experiment is equipped with an Intel P4 2.4GHz Personal laptop and 2GB memory.

Table -1 Experiment Result

	Original Lena	Watermarked Lena
Watermark Image		
Watermark Image		
Watermark Image		

Table 1 show the peak signal to noise ratio of performance of our proposed method of watermarked image and original image with various watermark image, where our watermarked images peak signal to noise ratio has a better performance than others.

IV. CONCLUSION

REFERENCES

- [1] B. Corona, M. Nakano, H. Pérez, "Adaptive Watermarking Algorithm for Binary Image Watermarks", *Lecture Notes in Computer Science, Springer, pp. 207-215, 2004.*
- [2] A. A. Reddy and B. N. Chatterji, "A new wavelet based logo-watermarking scheme," *Pattern Recognition Letters*, vol. 26, pp. 1019-1027, 2005.
- [3] P. S. Huang, C. S. Chiang, C. P. Chang, and T. M. Tu, "Robust spatial watermarking technique for colour images via direct saturation adjustment," *Vision, Image and Signal Processing, IEE Proceedings -*, vol. 152, pp. 561-574, 2005.
- [4] F. Gonzalez and J. Hernandez, "A tutorial on Digital Watermarking ", In *IEEE annual Carnahan conference on security technology, Spain, 1999.*
- [5] D. Kunder, "Multi-resolution Digital Watermarking Algorithms and Implications for Multimedia Signals", Ph.D. thesis, university of Toronto, Canada, 2001.